



Anwendungen: Excimer, UV, harmonische Nd:YAG (266nm), CO2
Filtermaterial: Spezialkunststoff
Filterfarbe: farblos
Filterdicke: ca. 6,0 mm
VLT: ca. 85 %

Schutzstufen

Wellenlänge (nm)	Zertifizierte Schutzstufen (EN 207)	OD-Werte
180–315	D LB5 + IR LB3	OD 5+
9000–11000	DI LB4	OD 4+
PF CE		

Data sheet

Laser Safety Filter 0145

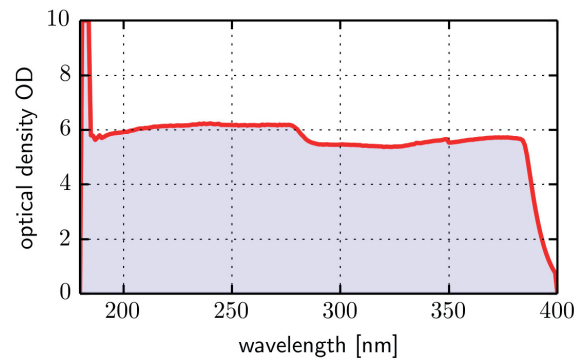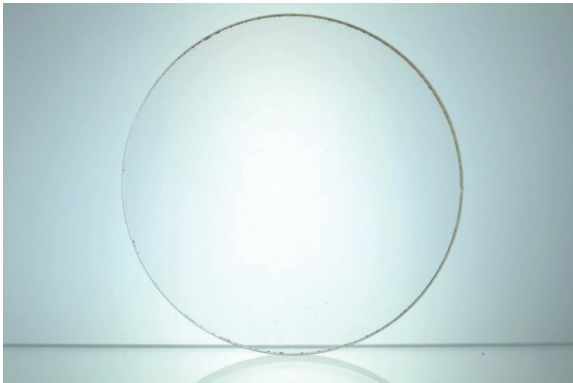

Applications: Excimer, UV, harmonic Nd:YAG (266nm), CO2
Filter material: special plastics
Filter color: clear
Filter thickness: appr. 6.0 mm
VLT: appr. 85 %

Protection Levels

Wavelength (nm)	Certified protection levels (EN 207)	OD-Values
180–315	D LB5 + IR LB3	OD 5+
9000–11000	DI LB4	OD 4+
PF CE		